



# Model IDS645


## SDS LOAD CELL

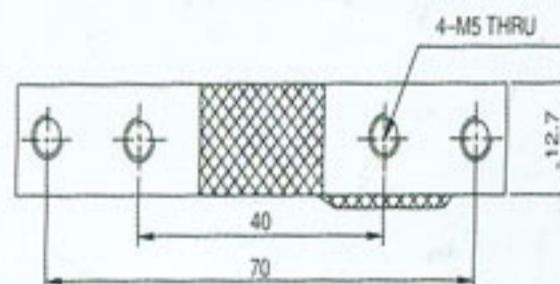

Rated Load	kg	0.6,1,3,5,8,20
Accuracy Class		S
Rated Output	mV/V	1.0±20%
Zero Balance	±%R.O.	0.1
Non-linearity	±%R.O.	0.05
Non-repeatability	±%R.O.	0.05
Hysteresis	±%R.O.	0.05
Creep in 2Min.	±%R.O.	0.05
Temp.Effect on Output	±%R.O./10°C	0.05
Temp.Effect on Zero	±%R.O./10°C	2
Input Resistance	Ω	1130±20
Output Resistance	Ω	1000±10
Insulation Resistance	MΩ	>2000
Excitation,Recommended	VDC	≤6
Operating Temp. Range	°C	10~+40
Safe Overload	%R.C.	150
Cable,Length	m	0.8mmx0.2

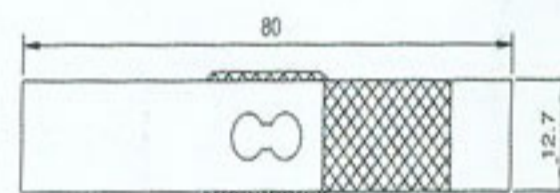

Color code of cable

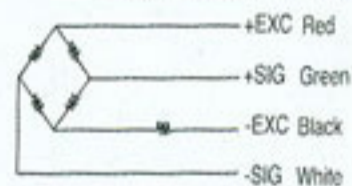

All specifications listed subject to change without notice.